



Optical Bonding & Lamination Capabilities

- In-house bonding and lamination facility
- The latest in contrast enhancement techniques
- Reduced costs
- Improved production lead-times and production rates
- Consistent high quality through direct control of critical process steps

Capabilities Include:



- DuPont™ Vertak® bonding process
 - Proven high-performance Gen2 adhesive technology
 - Reworkable process
 - UV stable material
- Direct bonding of LCDs from 1.5" to 30" active display area
- Cover glass to frame bonding options
 - In-frame bonding
 - On-frame bonding
 - Over-frame bonding
- In-house lamination process

Optical Benefits:

- Improved display contrast and sunlight readability
 - Improved light transmission
 - Reduced internal light reflections
- Reduced parallax issues

Additional Key Benefits:

- Prevents condensation and internal dust buildup
- Improved durability
- Improved impact resistance

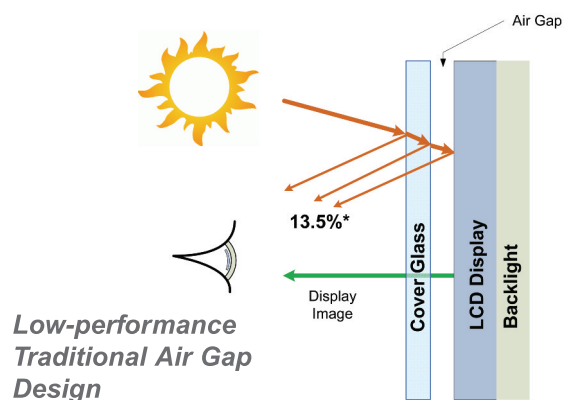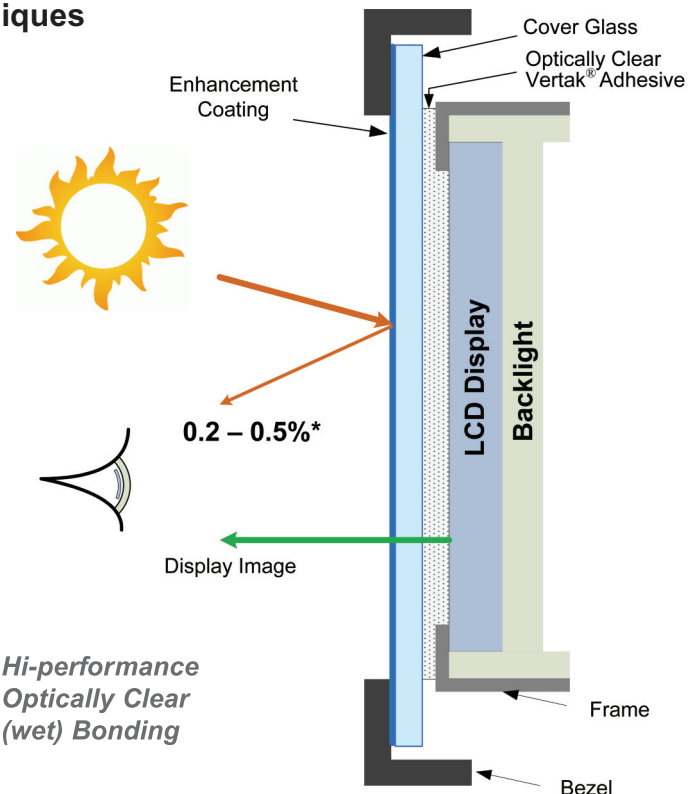

* based on coating and cover glass material/construction



Optical Bonding & Lamination Capabilities, *continued*

IEE's In-house Capabilities Include:


- DuPont™ Vertak® optical bonding of substrates to flat panel displays
 - Touch screens
 - Filters
 - Protective windows
 - Anti-reflective, anti-glare, anti-smudge and contrast enhancement windows
- 1,000 square foot Class 10,000 clean room
 - Laminar flow benches = Class 100
- Hot roller lamination and autoclave
 - EMI filters: ITO, wire-mesh, micro-mesh
- Laser cutter
 - Finish cut all display filter material
- Robotic dispenser
- Plasma surface cleaner
- UV curing system
- Radiometer
- Darkroom for display performance measurements

Mechanical Benefits:

- Increases impact resistance
- Prevents condensation and internal dust buildup
- Durability against vibration, extreme temperatures, altitudes and vandalization
- Reworkability enables complete restoration of LCD and original substrate at any time

Advantages of Using Vertak® Adhesive:

- Excellent adhesion and compliancy properties
- Optically clear with low refractive index
- Optimized viscosity
- Cured adhesive stable at over 100° C
- Highly resistant to yellowing, delamination or bubbling
- Withstands extreme temperature, humidity, shock and vibration
- Superior bond strength
- Low curing shrinkage

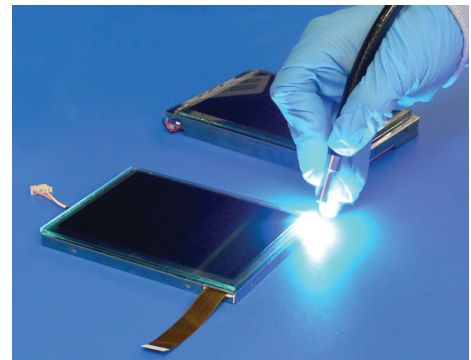

Note: IEE is registered with the US DOS and as such we adhere to all ITAR regulations as it pertains to 'defense articles'.

ISO 9001:2008 Certified



IEE Inc. 7723 Kester Avenue Van Nuys, CA 91405 Tel: (818) 787-0311
E-mail: mail@ieeinc.com www.ieeinc.com